



Manual, Assembly instruction: Brodit 514796

For use with Apple original Lightning to USB Cable. With tilt swivel. Fits devices with skin that has the following dimensions: Height: 137-144 mm, Width: 75 mm, Thickness: 2-11 mm.

1.)

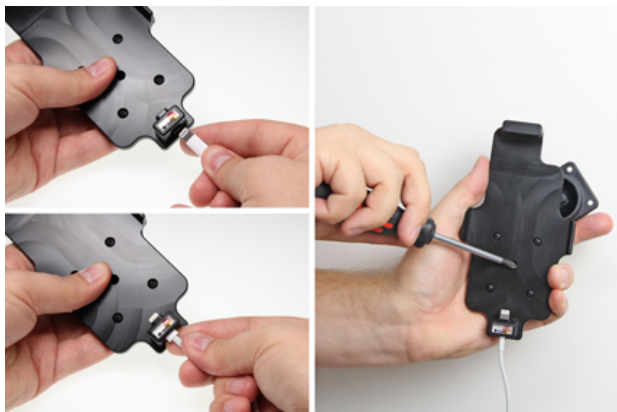

2.)

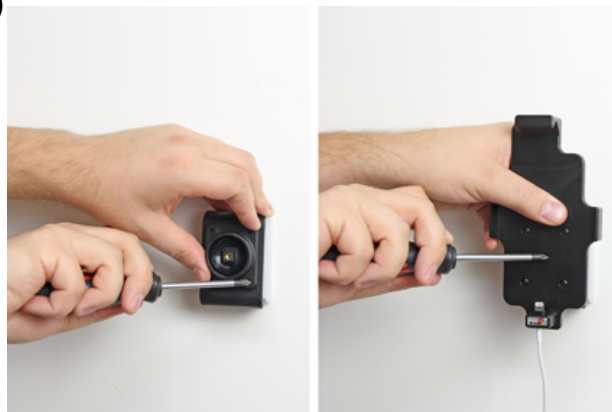

3.)



4.)



Please read all of the instructions and look at the pictures before installing.

1. Place the connector of the cable in the hole in the lower part of the holder. Carefully press the connector downward and forward so it passes the locking and goes into the hole. Press until you hear/feel the connector snap into place in the holder. Loosen the screw in the center of the holder so you can remove the tilt swivel attaching plate on the back.

2. Place the attaching plate onto the desired position. Screw the attaching plate into place with the enclosed screws. Place the holder over the attaching plate so the screw fits in the hole in the tilt swivel. Tighten the screw firm at first, then loosen it a bit so the holder is firmly in place, but still can be adjusted.

3. To place the device in the holder: Place the upper part of the device in the upper part of the holder and press it upward so the top part of the holder slides upward. Press the lower part of the device forward into the holder. When the device is placed straight over the connector in the holder, take the device straight downward so the connector is connected. Carefully, press straight downward on top of the device until you hear/feel it snaps into place. To remove the device from the holder: Press the device straight upward so the top part of the holder slides upward. When the device is set free from the connector, pull the lower part of the device toward you and slide the device downward out of the holder.

4. The holder is in place.