

Manual, Assembly instruction: Brodit 541854

Passive holder with tilt swivel. Adjustable holder, width 210-243mm, height 136-164mm. With spring stud locking.


1.)



2.)



3.)

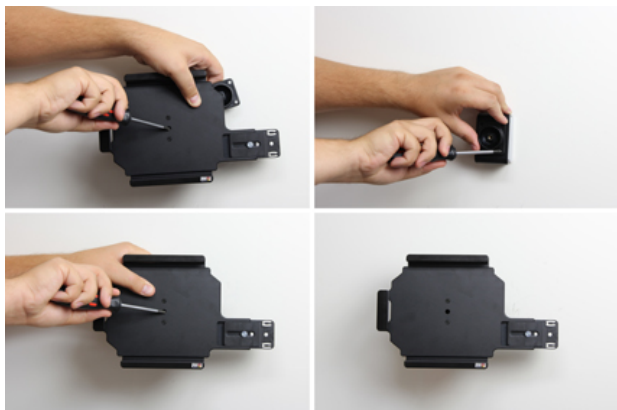

4.)



Please read all of the instructions and look at the pictures before attaching the holder.

1. Adjust the holder to fit your device: Loosen the screws on the front side of the holder, as well as the screw on the adjustable arm. Pull the adjustable sides apart until you reach maximum width and pull out the adjustable arm. Slide your device sideways into the holder. Press the sides together so the device is firmly in place.

2. Place the locking block onto the adjustable arm and press it toward the device. Remove the locking block carefully, keeping the adjustable arm exactly in the set position. Remove the device carefully, keeping the sides exactly in the set position. Fixate the size of the holder by tightening the screws on front of the holder as well as the screw on the adjustable arm.

3. Install the holder: Loosen the screw in the center of the holder so you can remove the tilt swivel attaching plate on the back. Place the attaching plate onto the desired position. Screw the attaching plate into place with the enclosed screws. Place the holder over the attaching plate so the screw fits in the hole in the tilt swivel. Tighten the screw until the holder is firmly in place, but still can be adjusted.

4. The holder is in place.