


Manual, Assembly instruction: Brodit 747386

Active holder for fixed installation. With spring stud locking. Fits original skin. Easy-switching system. 2,5A charging. With AMPS, VESA 75 holes.

1.)

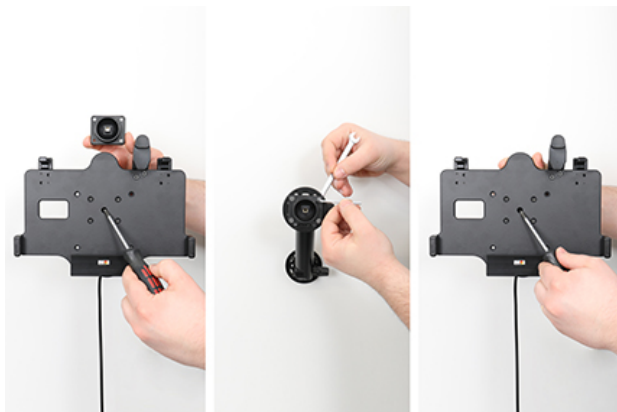

2.)



3.)



4.)



Please read all of the instructions and look at the pictures before attaching the holder.

1. Loosen the screw in the center of the holder so you can remove the tilt swivel attaching plate on the back. Place the attaching plate onto the desired position. Screw the attaching plate into place with the enclosed screws. Place the holder over the attaching plate so the screw fits in the hole in the tilt swivel. Tighten the screw until the holder is firmly in place, but still can be adjusted.

2. To place the device in the holder: Press the spring stud locking upward. Place the lower part of the device in the holder, then flip/press the upper part forwards so it snaps into place in the holder. Press the spring stud locking downward.

3. To remove the device from the holder: Press the spring stud locking upward. Press upwards on the upper part of the holder, in the same time pull the upper part of the device out from the holder and then lift the device up and out from the holder.

4. The holder is in place.